


DATA OF CRANES

Crane	TITAN (floating crane)
Configuration	2-19.3 TON HOOKS WITH EQUALIZER
Crane length	205' 0 10/16" (62.5m)
Crane width	108' 3 3/16" (33m)
Working range	360°
Max. working radius	154' (47m)
Min. working radius	>114' (34.7m)
Capacity at 173' (52.7m)	143ton
Total load	137.5ton
↳Load	122.5ton
↳Hook block+lift.equip.	15ton

Crane	LR 1600/2 (crawler crane)
Configuration	H9 200 84m
Crane length	17.10m-25.10m
Crane width	9.9m
Working range	360°
Max. working radius	47.5m
Min. working radius	>12m
Capacity at 52m	139ton
Total load	131.5ton
↳Load	116.5ton
↳Hook block+lift.equip.	15ton

RAILBEAM REMOVAL / INSTALLATION PROCEDURE

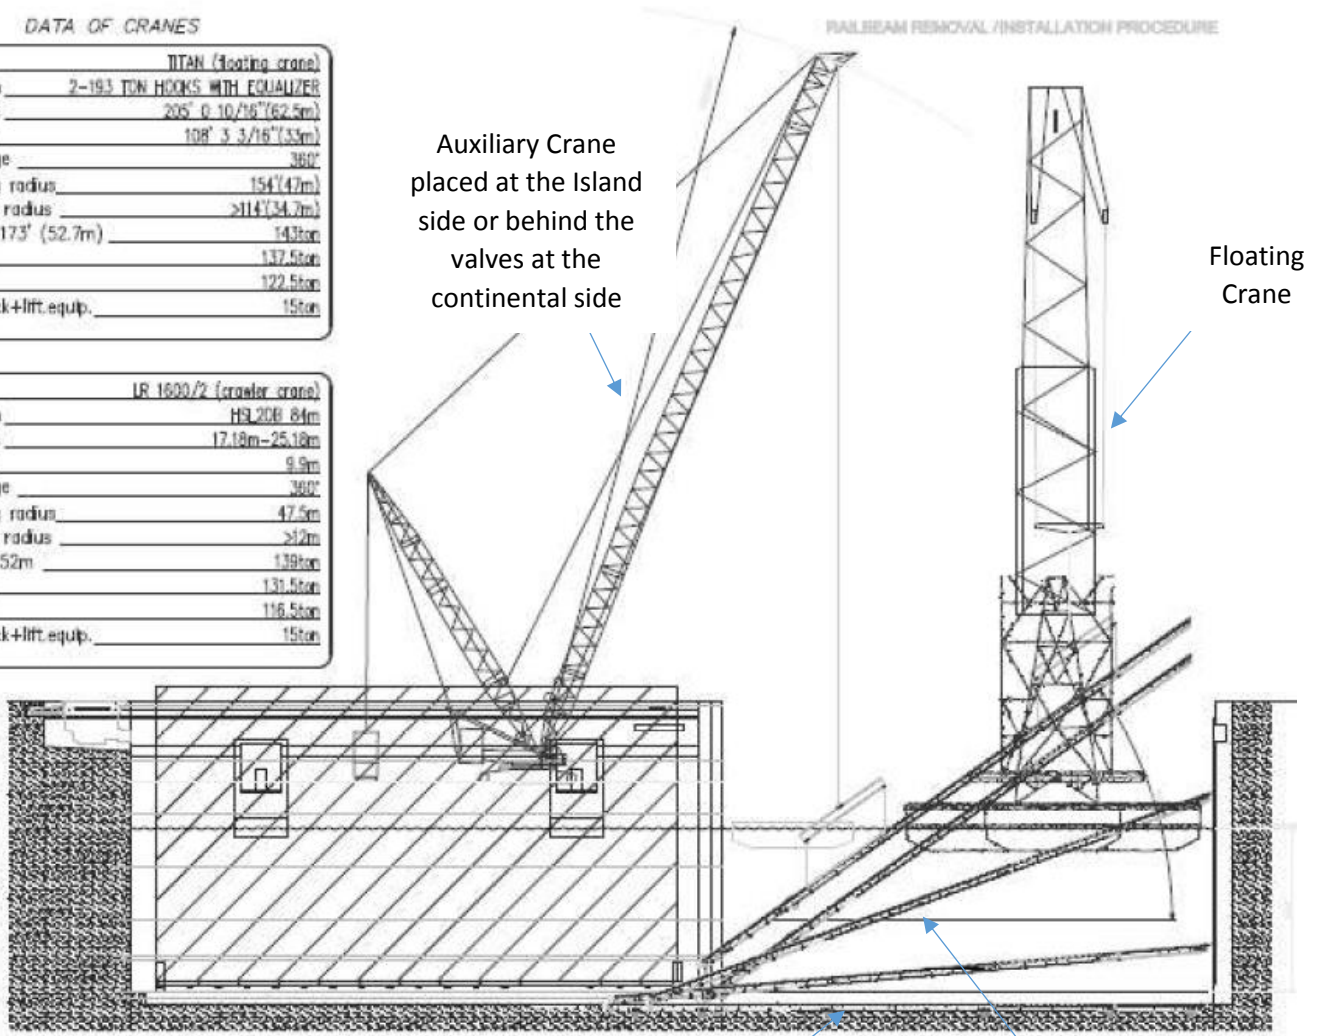

Auxiliary Crane placed at the Island side or behind the valves at the continental side

Floating Crane

Bottom of chamber

Lower trackway

